


CLASSIC FRAME (S-Series & C-Series) - SINGLE / DUTCH

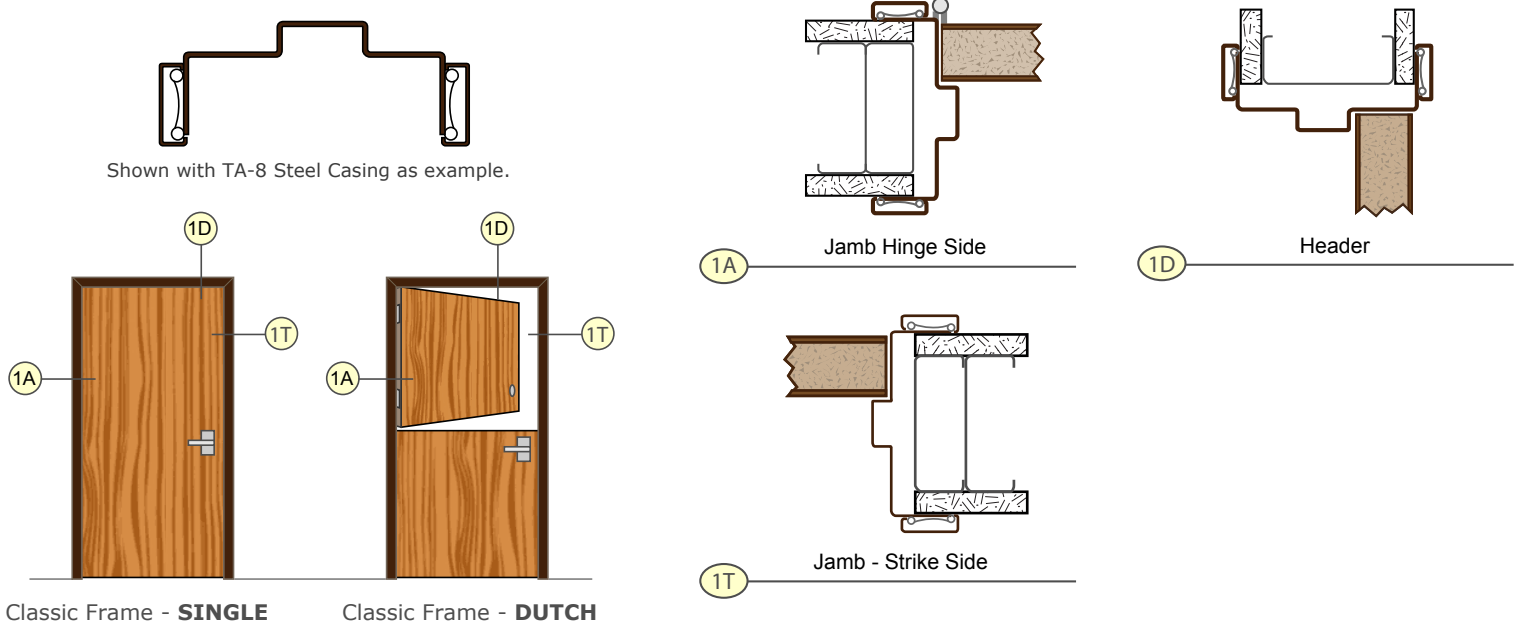

CLASSIC FRAME (S-Series & C-Series) - SINGLE / DUTCH

RELATED INFORMATION

SOUND

FRAME MATERIALS	DOOR SIZE AND WEIGHT	JAMB DEPTH RANGES	RATINGS
Pre-Finished Steel	<p>Door Thickness: 1 3/8" or 1 3/4"</p> <p>Max. Door Weight: 500 Lbs.</p> <p>Max. Door Width: 4' - 0"</p> <p>Max. Door Height: 12' - 0" *</p>	<p>Standard Jamb Depths</p> <p>S-Series (20 gage): 2 1/4", 2 7/8", 3 1/2", 3 3/4", 4", 4 5/8", 4 7/8", 5" and 5 3/8"</p> <p>C-Series (18 gage): 2 1/4", 2 7/8", 3 1/2", 3 3/4", 4", 4 5/8", 4 7/8", 5", 5 3/8", 6 5/8", 6 7/8" and 7 1/4"</p> <p>Custom Jamb Depths</p> <p>C-Series (18 gage): 2 1/4" to 13" in 1/8" increments.</p>	Not Available

* Height on custom Jamb Depths is limited to 10' - 1"

All widths and heights are inside dimensions - net door opening size.

CLASSIC FRAME (S-Series & C-Series) - SINGLE / DUTCH

FIRE RATING

JAMB DEPTH RANGE	20 minute* (C-Series only)	45, 90 minute (S & C-Series)	GENERAL INFORMATION
<p>Min. Jamb Depth: 3 3/8"</p> <p>Max. Jamb Depth: 13"</p>	<p>Max. Door Width: 4' - 0"</p> <p>Max. Door Height: 10' - 0"</p>	<p>Max. Door Width: 4' - 0"</p> <p>Max. Door Height: 9' - 0"</p>	<ol style="list-style-type: none"> All openings approved for Positive and Neutral pressure unless otherwise noted. All ratings apply to steel stud, wood stud, or masonry construction. All ratings approved for category "A" and "B" doors with category "G" edge sealing. Timely's fire rated <i>Metal "U" Insert</i> is recommended for masonry installations. If wood sub-frame is used in place of <i>Metal "U" Insert</i>, it will be necessary to use fire rated drywall on both sides of wood to maintain fire rating. Wood or aluminum casing does not affect ratings on door frames. Single frames must be prepared for strike. Embossed WHI 90 min. label is available for Primer Galvanized Frames only. Metal 90 min. label riveted to frame is available.

All dimensions shown are inside dimensions - net door opening size.

* Tested and approved for Neutral Pressure only - not Positive Pressure approved.

Distributors of Timely Frames may be approved to purchase labels and apply them to frames at their own facility. Intertek has set guidelines and a fee schedule for this program. Requirements and prices are available from Timely or Intertek.