



Shown with TA-8 Steel Casing as example.

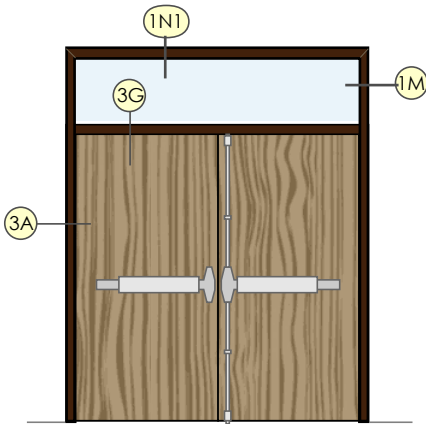


Kerfed Frame - PAIR with Transom




TA-46 Gasket: Weather Strip/Smoke Seal.
 Available in Browntone and White.

Note: Specify Color and Length.

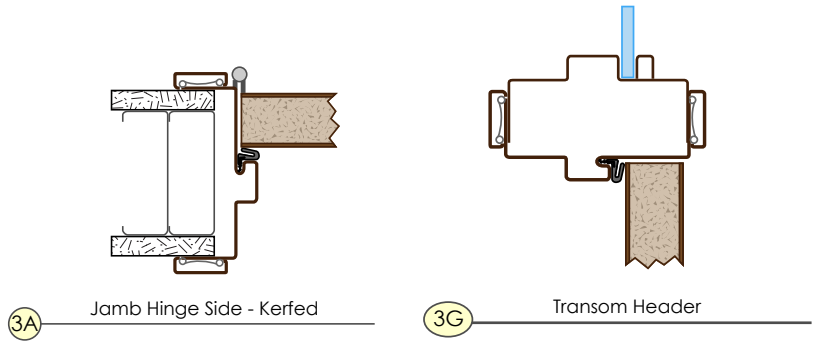

3A Jamb Hinge Side - Kerfed

3G Transom Header

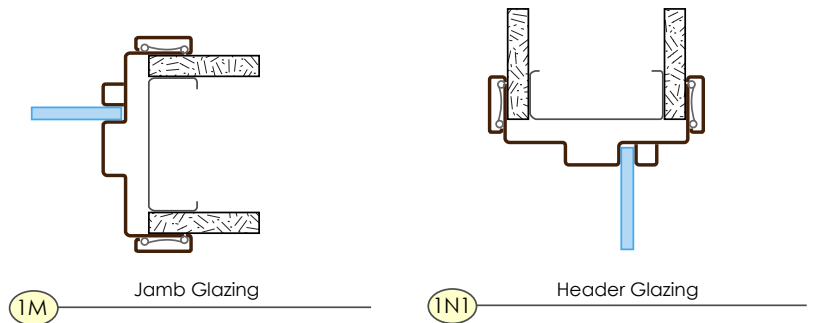

1M Jamb Glazing

1N1 Header Glazing

ROUGH OPENING DIMENSIONS

WIDTH

For standard frame with transom and no sidelights, opening width is same as for a three sided frame. For a pair of doors, the rough opening with is 1 1/4" larger than the total nominal width of the doors plus the width of any astragal mounted between the doors.


Width is sum of the nominal width of both doors leaves plus the astragal if it is mounted between the doors

ROUGH OPENING: Nominal Door width(s) + astragal width (if mounted between the doors) + 1 1/4"

HEIGHT

The rough opening height (H) is the net door area height (D) plus transom height (T) plus 2" for the transom mullion plus 13/16" for adjustment.

ROUGH OPENING: The rough opening height (H) is the net door area height (D) plus transom height (T) plus 2" for the transom mullion plus 13/16" for adjustment.

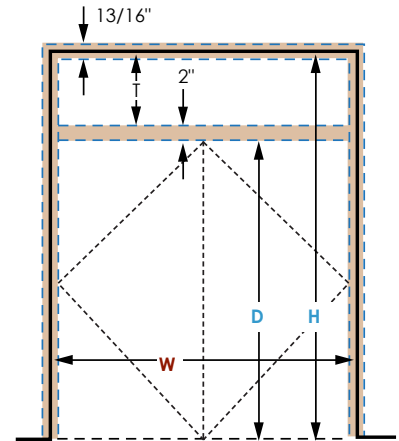

W = Nominal Door width(s) + Astragal + 1 1/4"

H = The rough opening height (H) is total of D + T + 2" + 13/16"

RELATED INFORMATION

FRAME MATERIALS	DOOR SIZE AND WEIGHT	JAMB DEPTH RANGES
Prefinished Steel	Max. Door Weight: 250 Lbs. each Max. Door Width: 2 x 4' - 0" Max. Door Height: 8' - 0"	Jamb Depths: 4" to 8"
DOOR THICKNESS		
1 3/4" only		
FRAME THICKNESS		
18 gauge		

All widths and heights are inside dimensions - net door or glass opening size.

FIRE RATING DOOR AREA

JAMB DEPTH RANGE	45, 90 minute (S & C-Series)	GENERAL INFORMATION				
Min. Jamb Depth: 4" Max. Jamb Depth: 8"	<table border="0"> <tr> <td>Width: up to 6'</td> <td>Width: over 6' up to 8'</td> </tr> <tr> <td>Max. Height: 8' - 0"</td> <td>Max. Height: 8' - 0"</td> </tr> </table>	Width: up to 6'	Width: over 6' up to 8'	Max. Height: 8' - 0"	Max. Height: 8' - 0"	<ol style="list-style-type: none"> All openings approved for Positive and Neutral pressure unless otherwise noted. All ratings apply to steel stud, wood stud, or masonry construction. All ratings approved for category "A" and "B" doors with category "G" edge sealing. Timely's fire rated Metal "U" Insert is recommended for masonry installations. If wood subframe is used in place of Metal "U" Insert, it will be necessary to use fire rated drywall on both sides of wood to maintain fire rating. Wood or Aluminum casing does not affect ratings on door frames. Wood casing must be applied with hot melt glue or contact adhesive on 90 minute rated frames and on all glazed openings with 45 minute or 60 minute rating. On all other fire rated frames, wood casing can be applied with nails or finish head screws on jamb and mullions. Single frames must be prepared for strike or reinforced with (TA-47) for a rim exit device strike. Embossed WHI 90 min. label is available for Primer Galvanized Frames only.
Width: up to 6'	Width: over 6' up to 8'					
Max. Height: 8' - 0"	Max. Height: 8' - 0"					
<p>All dimensions shown are inside dimensions - net door opening size.</p> <p>Distributors of Timely Frames may be approved to purchase labels and apply them to frames at their own facility. Intertek has set guidelines and a fee schedule for this program. Requirements and prices are available from Timely or Intertek.</p>						

FIRE RATINGS 45 MINUTE TRANSOM AREA

ASSEMBLY	GLASS AREA*	GENERAL INFORMATION				
Max. Width: 9' - 7" Max. Height: 9' - 11"	<table border="0"> <tr> <td>Width: up to 2'</td> <td>Width: over 2' up to 3'**</td> </tr> <tr> <td>Max. Height: 8' - 11"</td> <td>Max. Height: 4' - 6'***</td> </tr> </table> <p>Visible light is 1" less in width and height</p>	Width: up to 2'	Width: over 2' up to 3'**	Max. Height: 8' - 11"	Max. Height: 4' - 6'***	<ol style="list-style-type: none"> All openings are approved for Positive and Neutral pressure unless otherwise noted. All ratings apply to steel stud, wood stud, or masonry construction. All ratings approved for category "A" and "B" doors with category "G" edge sealing. Timely's fire rated Metal "U" Insert is recommended for masonry installations. If wood subframe is used in place of Metal "U" Insert, it will be necessary to use fire rated drywall on both sides of wood to maintain fire rating. Aluminum casing does not affect fire rating. Wood casing must be applied with hot melt glue or contact adhesive on 90 minute rated frames and on all glazed openings with 45 minute or 60 minute rating. On all other fire rated frames, wood casing can be applied with nails or finish head screws on jamb and mullions.
Width: up to 2'	Width: over 2' up to 3'**					
Max. Height: 8' - 11"	Max. Height: 4' - 6'***					
<p>All dimensions shown are inside dimensions - net door opening size.</p> <p>* Multiple Glass Areas can be created with Mullions. The only limitations are Max. Assembly Width and Height.</p> <p>** For glass widths exceeding 24" the maximum glass area is 1296 sq. in. unless approved by local AHJ.</p> <p>Distributors of Timely Frames may be approved to purchase labels and apply them to frames at their own facility. Intertek has set guidelines and a fee schedule for this program. Requirements and prices are available from Timely or Intertek.</p>						