


POCKET DOOR TRIM KIT (P-Series) - SINGLE WITH SIDELIGHT

Shown with TA-8 Steel Casing as example.

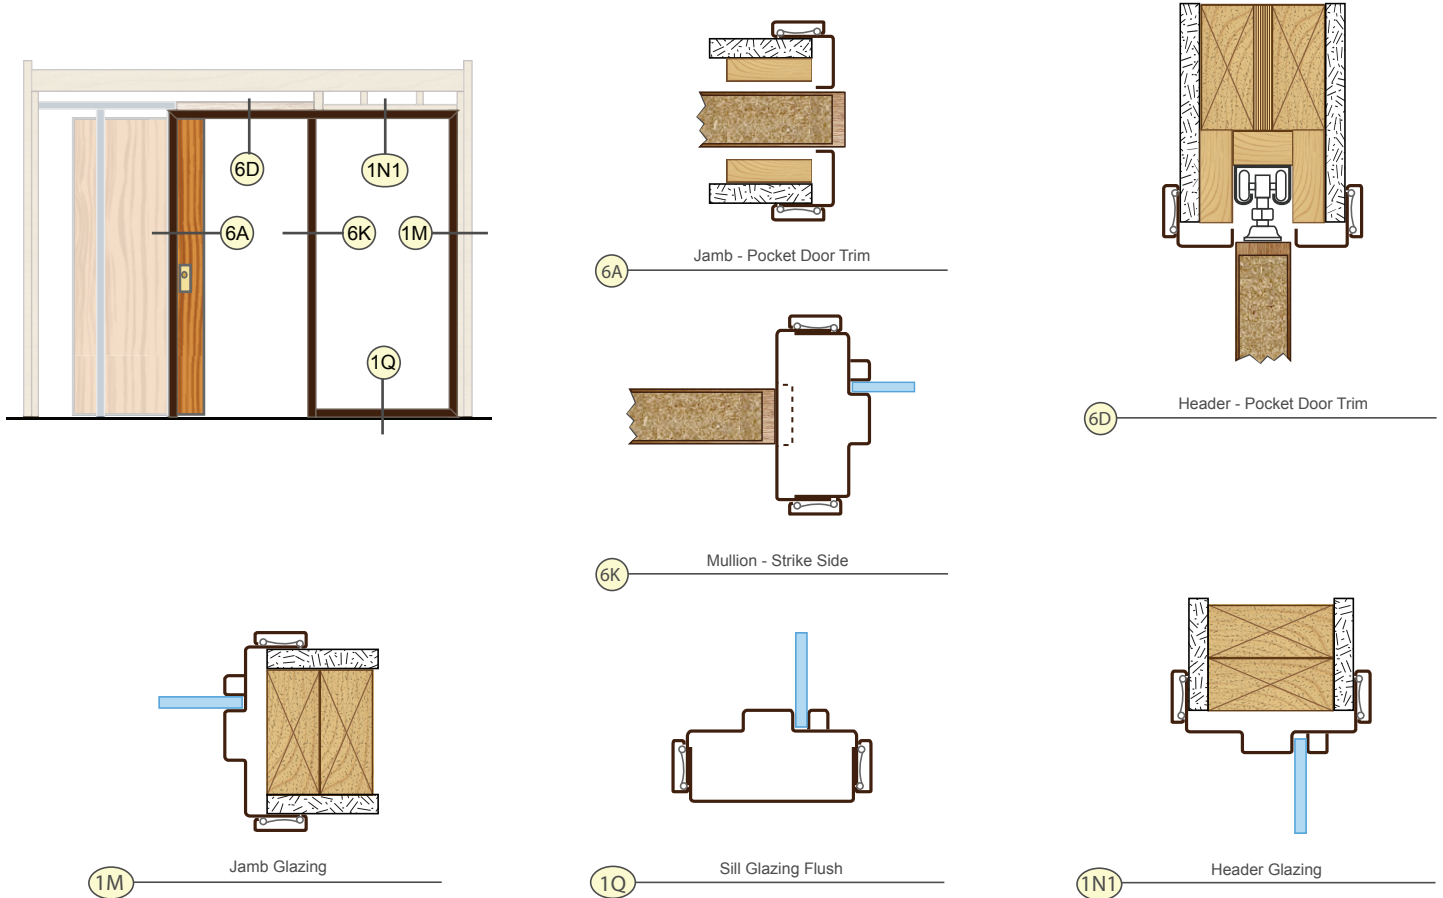

POCKET DOOR TRIM KIT (P-Series) - SINGLE WITH SIDELIGHT

RELATED INFORMATION

FRAME MATERIALS	JAMB - NO STOP	JAMB DEPTHS
Prefinished Steel	Max. Door Width: 5' - 0"	Jamb Depths: 4" to 13" in 1/8" increments
DOOR THICKNESS	Opening Width: (Door Width) - 1/2"	
1 3/8" and 1 3/4"	Max. Door Height: 10' - 0"	
FRAME THICKNESS		
18 gauge		

POCKET DOOR TRIM KIT (P-Series) - SINGLE WITH SIDELIGHT

ROUGH OPENING DIMENSIONS

Framing for pocket doors is controlled by the framing instructions included in the pocket door hardware. The framing height for the sidelight area is the same height as the bottom of the track assembly. Since framing for this area requires a stub wall below the header, a shear panel of some sort is recommended to stiffen the joint where the closure side of the track meets the rough framing at the head.


WIDTH

ROUGH OPENING WIDTH W1: Defined by Pocket Door Hardware

ROUGH OPENING WIDTH W2: Total of the the Sidelight Width(s) plus the total Net Glass Width(s) plus 2" for each Mullion plus 1 1/4"

HEIGHT

ROUGH OPENING HEIGHT H1: Same as dimension from floor to bottom of track assembly

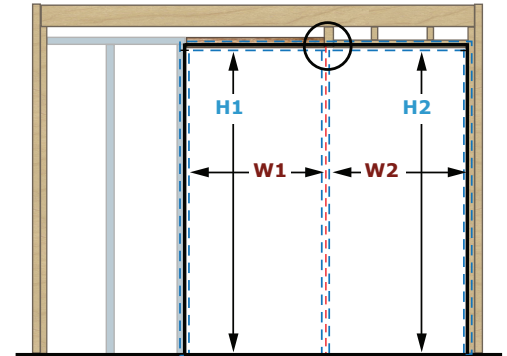

W1 = Defined by Pocket Door Hardware

W2 = Sidelight Glass width(s) + 2" for each mullion + 1 1/4"

H1 = Same as dimension from floor to bottom of track assembly