



Frame Hinge and Strike Locations  
 1 3/8" with 3 Each 3 1/2" Hinges

NOTE: When using this chart for premachining door measurements, reduce the A & C dimensions 3/32" each for door clearance.

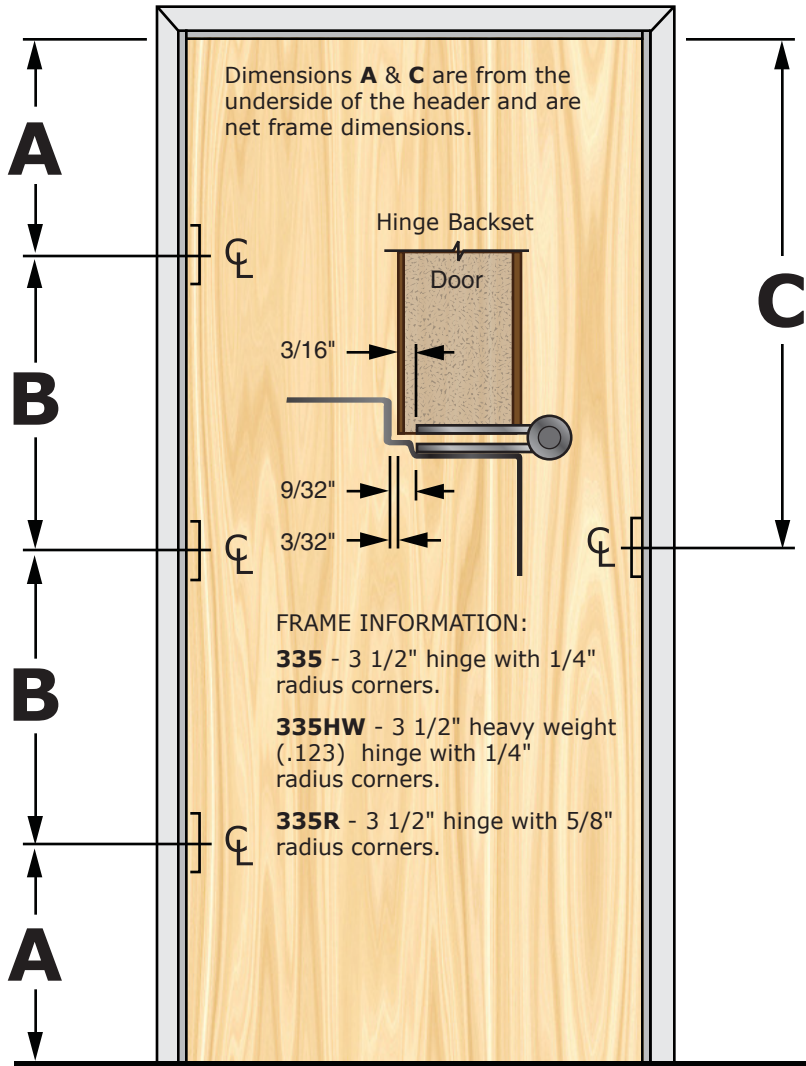


NET FRAME DIMENSIONS				
HEIGHT	A	B	C	
5-0	10-3/32	20	20-3/32	
5-1	10-3/32	20-1/2	21-3/32	
5-2	10-3/32	21	22-3/32	
5-4	10-3/32	22	24-3/32	
6-0	10-3/32	26	32-3/32	
6-8	10-3/32	30	40-3/32*	
6-9	10-3/32	30-1/2	41-3/32	
6-9	10-3/32	30-1/2	40-19/32*	
7-0	10-3/32	32	44-3/32	
7-0	10-3/32	32	42-3/32*	
7-4	10-3/32	34	48-3/32	
7-6	10-3/32	35	50-3/32	
7-8	10-3/32	36	52-3/32	
7-10	10-3/32	37	54-3/32	
8-0	10-3/32	38	56-3/32	
8-4	10-3/32	40	60-3/32	
8-6	10-3/32	41	62-3/32	
8-8	10-3/32	42	64-3/32	
8-10	10-3/32	43	66-3/32	
9-0	10-3/32	44	68-3/32	
10-0	10-3/32	50	80-3/32	

+ Frame Heights are 3/16" longer than callout door height unless ordered net. (3/32" top, 3/32" bottom for clearance).

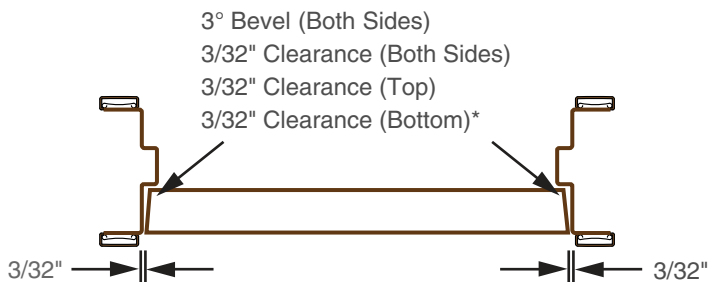

\*Additional clearance is required for Thresholds and various floor conditions.

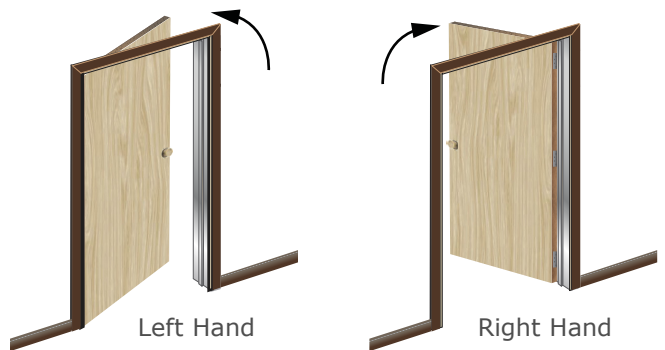

Handing Information: To establish handing always **Push** the door away from you.

\*Reversible - Frame can be used as Left or Right Hand, swing in or out

FOR SPECIFICATIONS NOT SHOWN, PLEASE CONSULT OFFICE.  
 PLEASE SPECIFY IF USING COMMERCIAL OR RESIDENTIAL WEIGHT HINGES.