


SINGLE FAMILY

- Increased home security
- 90 min Fire Rating (meets code in every jurisdiction for house to garage)
- Built in weatherstripping



FRAME SELECTION RECOMMENDATIONS

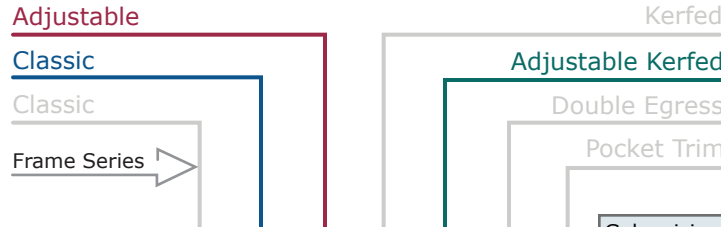

	Frequency	S	C	A	CK	AK	DE	P	Galvanizing Required
Main Entrance	M	•	•	•	•	P	•	•	Y
Secondary Entrance	L	•	•	•	•	P	•	•	Y
House to Garage (Fire Door)	L	•	•	•	•	P	•	•	Y
Exterior from Garage	L	•	•	•	•	P	•	•	Y
Safe Room	L	•	P	O	•	•	•	•	H


Frequency	Use of Frame	Galvanizing Required
H = High M = Medium L = Low	P = Preferred O = Optional • = not recommended	Y = Always H = Galvanize in Humid Climate

Accessory Hardware
 TA-46 Kerf Smoke Gasket/
 Weatherstrip

CLASSIC FRAME

S C

S-Series (20 gage, Factory Prefinished)



General use for all interior openings.

Minimum Jamb Depth – 2 1/4"

Maximum Jamb Depth – 5 3/8"

Fire Rating – 90 Minutes (Minimum Jamb Depth 3 3/8" for rating)

Maximum Door Weight – 500 lbs.

C-Series (18 gage, Factory Prefinished)

General use for all interior openings requiring additional strength and impact resistance of 18 gage steel.

Minimum Jamb Depth – 2 1/4"



Maximum Jamb Depth – 13"

Fire Rating – 90 Minutes (Minimum Jamb Depth 3 3/8" for rating)



Maximum Door Weight – 500 lbs.

CASING RECOMMENDATIONS



TA-8 Steel




TA-30 Steel



TA-35 PVC




Wood Casings (supplied by others)

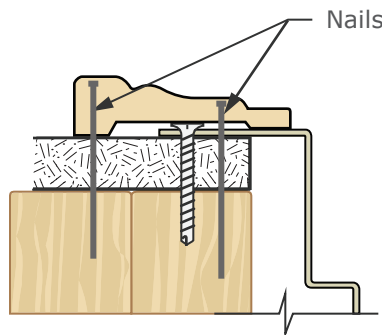

ADJUSTABLE KERFED FRAME

AK

AK-Series (20 gage, electro-galvanized, Prime Coat Finish)



Use for interior and exterior openings requiring a seal against smoke, sound, weather, and light. Adjustable Frame has a common door section and (6 sizes of outer sections, each with 1" of adjustability.) Can be pre-hung and is designed for wood casing application. Not available as a prefinished frame or with heat treated casing attachment clips.

Minimum Jamb Depth – 4 1/2"

Maximum Jamb Depth – 10 1/2"

Fire Rating – 90 Minutes

Maximum Door Weight – 250 lbs.