



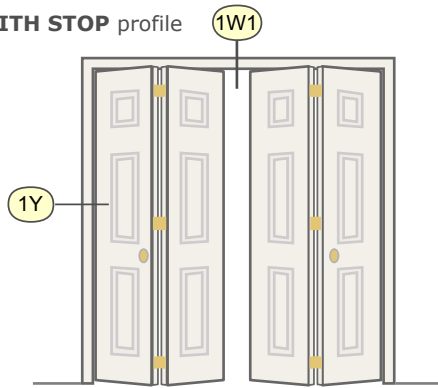



BI-FOLD WITH STOP profile



BI-FOLD NO STOP profile

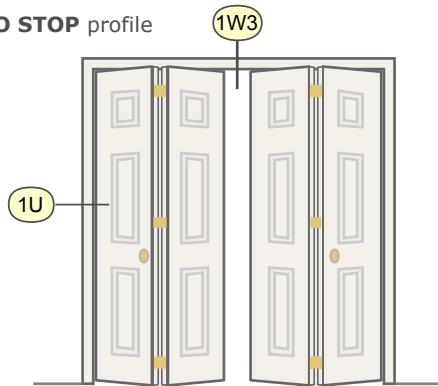

RELATED INFORMATION

SOUND

FRAME MATERIALS	DOOR SIZE AND WEIGHT	JAMB DEPTH RANGES	RATINGS
Prefinished Steel	Door Thickness: 1 3/8" or 1 3/4" Max. Door Width: 10' - 0" Max. Door Height: 12' - 0" *	Standard Jamb Depths S-Series (20 gauge): 3 3/4", 4", 4 5/8", 4 7/8", 5" and 5 3/8" C-Series (18 gauge): 3 1/2", 3 3/4", 4", 4 5/8", 4 7/8", 5", 5 3/8", 6 5/8", 6 7/8" and 7 1/4" Custom Jamb Depths C-Series (18 gauge): 2 5/8" to 13" in 1/8" increments.	Not Available

* Height on custom Jamb Depths is limited to 10' - 1" All widths and heights are inside dimensions - net door or glass opening size.

ROUGH OPENING DIMENSIONS

WIDTH

For Bi-Fold doors, the rough opening width is 1 1/4" larger than the total nominal width of the doors. If using a pair of 2'0" bi-fold doors, each door is 1'0" nominal width. Since Bi-fold doors are net sized to fit the frame, the unit will fit a 2'0" net inside width frame.

Width is 2 x nominal panel width for a 2 door bi-fold, and 4 x nominal door width for a 4 door bi-fold


ROUGH OPENING: Nominal Door width + 1 1/4"

HEIGHT

For a Bi-Fold door, the rough opening height is 1" over nominal height or 13/16" over net height. Since Timely standard frames are actually 3/16" longer than the nominal height (Timely 7'0" frames are actually 7'0 3/16" long)

Timely Standard Height - 3/16" over nominal height

ROUGH OPENING: Nominal height plus 1"

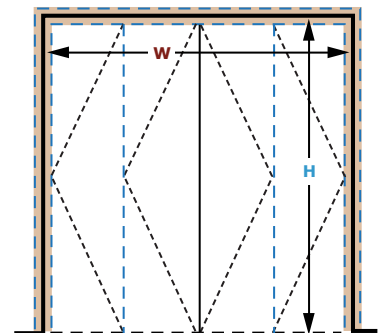

W = Nominal door width + 1 1/4"
H = Nominal height + 1"
 Net height + 13/16"