



Frame Hinge and Strike Locations
 1 3/4" with 3 Each 4" Hinges

NOTE: When using this chart for premachining door measurements, reduce the A & C dimensions 3/32" each for door clearance.

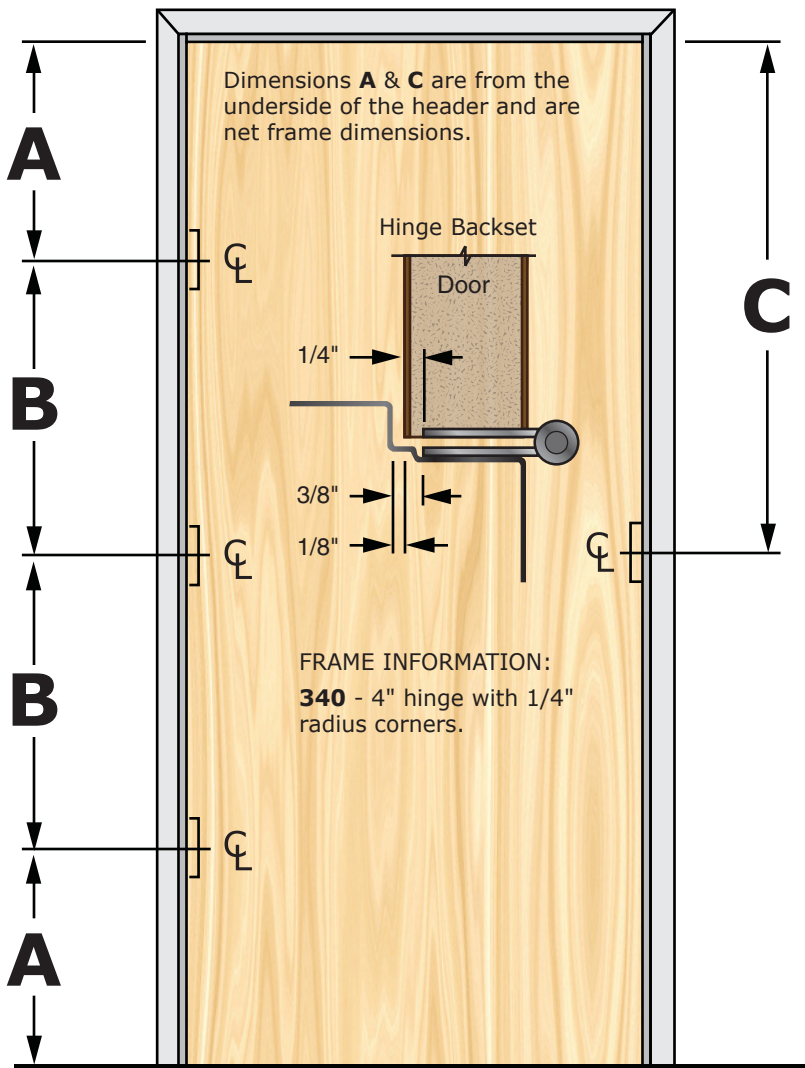


| NET FRAME DIMENSIONS | | | |
|----------------------|----------|--------|-----------|
| HEIGHT | A | B | C |
| 5-0 | 10-11/32 | 19-3/4 | 20-3/32 |
| 5-1 | 10-11/32 | 20-1/4 | 21-3/32 |
| 5-2 | 10-11/32 | 20-3/4 | 22-3/32 |
| 5-4 | 10-11/32 | 21-3/4 | 24-3/32 |
| 6-0 | 10-11/32 | 25-3/4 | 32-3/32 |
| 6-8 | 10-11/32 | 29-3/4 | 40-3/32* |
| 6-9 | 10-11/32 | 30-1/4 | 41-3/32 |
| 6-9 | 10-11/32 | 30-1/4 | 40-19/32* |
| 7-0 | 10-11/32 | 31-3/4 | 44-3/32 |
| 7-0 | 10-11/32 | 31-3/4 | 42-3/32* |
| 7-4 | 10-11/32 | 33-3/4 | 48-3/32 |
| 7-6 | 10-11/32 | 34-3/4 | 50-3/32 |
| 7-8 | 10-11/32 | 35-3/4 | 52-3/32 |
| 7-10 | 10-11/32 | 36-3/4 | 54-3/32 |
| 8-0 | 10-11/32 | 37-3/4 | 56-3/32 |
| 8-4 | 10-11/32 | 39-3/4 | 60-3/32 |
| 8-6 | 10-11/32 | 40-3/4 | 62-3/32 |
| 8-8 | 10-11/32 | 41-3/4 | 64-3/32 |
| 8-10 | 10-11/32 | 42-3/4 | 66-3/32 |
| 9-0 | 10-11/32 | 43-3/4 | 68-3/32 |
| 10-0 | 10-11/32 | 49-3/4 | 80-3/32 |

+ Frame Heights are 3/16" longer than callout door height unless ordered net. (3/32" top, 3/32" bottom for clearance).

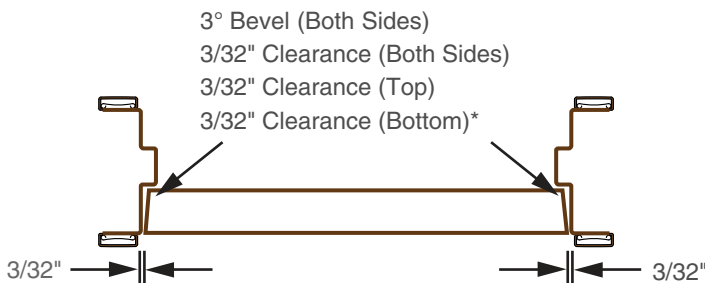

*Additional clearance is required for Thresholds and various floor conditions.

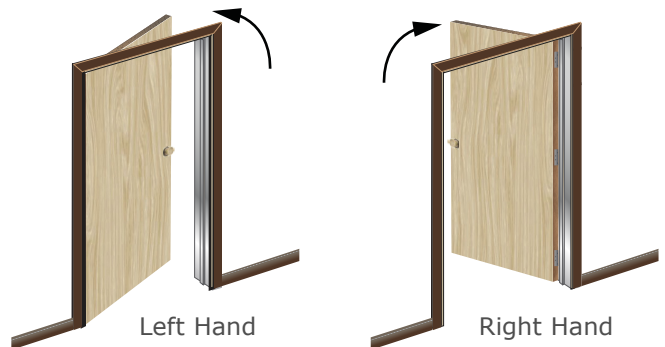

Handing Information: To establish handing always **Push** the door away from you.

*Reversible - Frame can be used as Left or Right Hand, swing in or out

FOR SPECIFICATIONS NOT SHOWN, PLEASE CONSULT OFFICE.